



^ Overview

Dimensions	Ø206 x 32.5 mm (Ø8.1 x 1.3")
WiFi Standard	WiFi 7
Spatial Streams	6
Coverage Area	140 m ² (1,500 ft ²)
Max. Client Count	300+
Uplink	10 GbE
Mounting	Ceiling, Wall (Lite Mount Included)
Power Method	PoE+

^ Performance

MIMO	
6 GHz	2 x 2 (DL/UL MU-MIMO)
5 GHz	2 x 2 (DL/UL MU-MIMO)
2.4 GHz	2 x 2 (DL/UL MU-MIMO)
Max. Data Rate	
6 GHz	5.8 Gbps (BW320)
5 GHz	4.3 Gbps (BW240)
2.4 GHz	688 Mbps (BW40)

32.5 mm

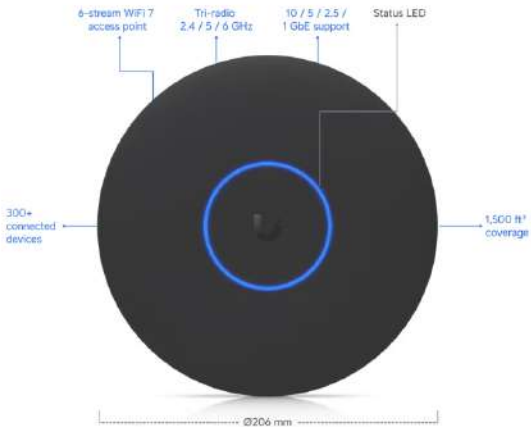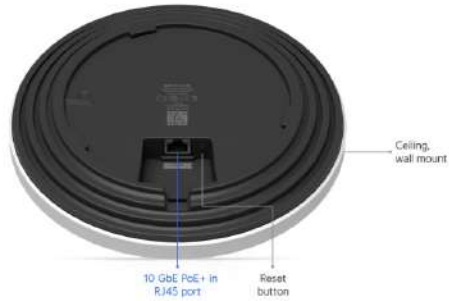

2.4 GHz

688 Mbps (BW40)

Antenna Gain

6 GHz

6 dBi

5 GHz

5 dBi

2.4 GHz

4 dBi

Max. TX Power

6 GHz

24 dBm

5 GHz

26 dBm

2.4 GHz

23 dBm

Max. BSSIDs

8 per Radio

Supported Data Rates

802.11be (WiFi 7)

6 GHz: 7.3 Mbps to 5.8 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/320)

5 GHz: 7.3 Mbps to 4.3 Gbps (MCS0 - MCS13 NSS1/2/3/4, EHT 20/40/80/160/240)

802.11ax (WiFi 6)

7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)

802.11ac (WiFi 5)

6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)

802.11n

6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)

^ Features

Wireless Meshing

✓

Band Steering

✓

802.11v BSS Transition Management

✓

802.11r Fast Roaming

✓



(RRM)	▼
Advanced Radio Management	✓
Passpoint (Hotspot 2.0)	✓
Captive Hotspot Portal	
Custom Branding Landing Page	✓
Voucher Authentication	✓
Payment-Based Authentication	✓
External Portal Server Support	✓
Password Authentication	✓
Guest Network Isolation	✓
Private Pre-Shared Key (PPSK)	✓
WiFi Speed Limiting	✓
Client Device Isolation	✓
WiFi Schedules	✓
RADIUS over TLS (RadSec)	✓
Dynamic RADIUS-assigned VLAN	✓
<hr/>	
^ Hardware	
Max. Power Consumption	22W
Supported Voltage Range	42.5—57V DC
Networking Interface	(1) 10 GbE RJ45 port
Weight	750 g (1.7 lb)
Management	Ethernet
Enclosure Material	UV-stabilized polycarbonate, aluminum alloy
Mount Material	Stainless steel (SUS304), galvanized steel (SGCC)

NDAA Compliant

✓

Certifications

CE, FCC, IC, Anatel: 06630-25-08356

Operating Frequency

US/CA:

2400 - 2472 MHz

U-NII-1: 5150 - 5250 MHz

U-NII-2A: 5250 - 5350 MHz

U-NII-2C: 5470 - 5725 MHz

U-NII-3: 5725 - 5850 MHz

U-NII-5 to U-NII-8 : 5925 - 7125 MHz

Worldwide:

2400 - 2483.5 MHz

5150 - 5725 MHz

5925 - 7125 MHz

Ambient Operating Temperature

-30 to 40° C (-22 to 104° F)

Ambient Operating Humidity

5 to 95% noncondensing

^ **Software**

Application Requirements

└ UniFi Network

Version 9.0.114 and later (U7 Pro XG - White)

Version 9.1.120 and later (U7 Pro XG - Black)